

# Coil handling

## Telescopic coil grab




Head-fitting and length of gripping legs manufactured to suit your application




To comply with your specific quality and safety specifications, optional equipment is available on request

## Bundles grab

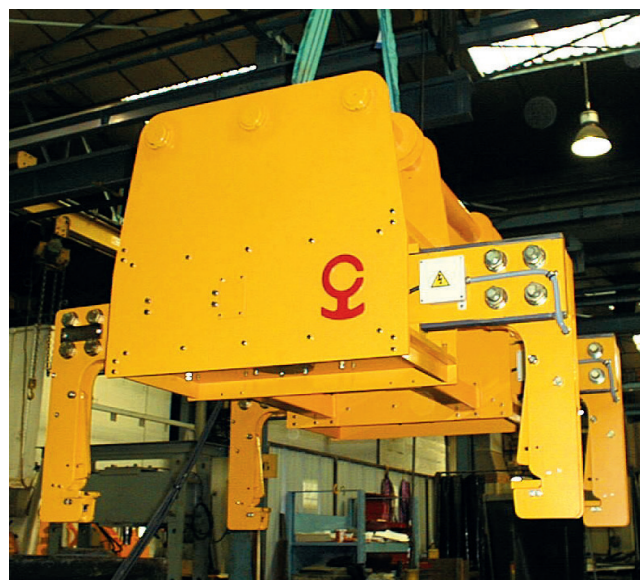

# Coil handling

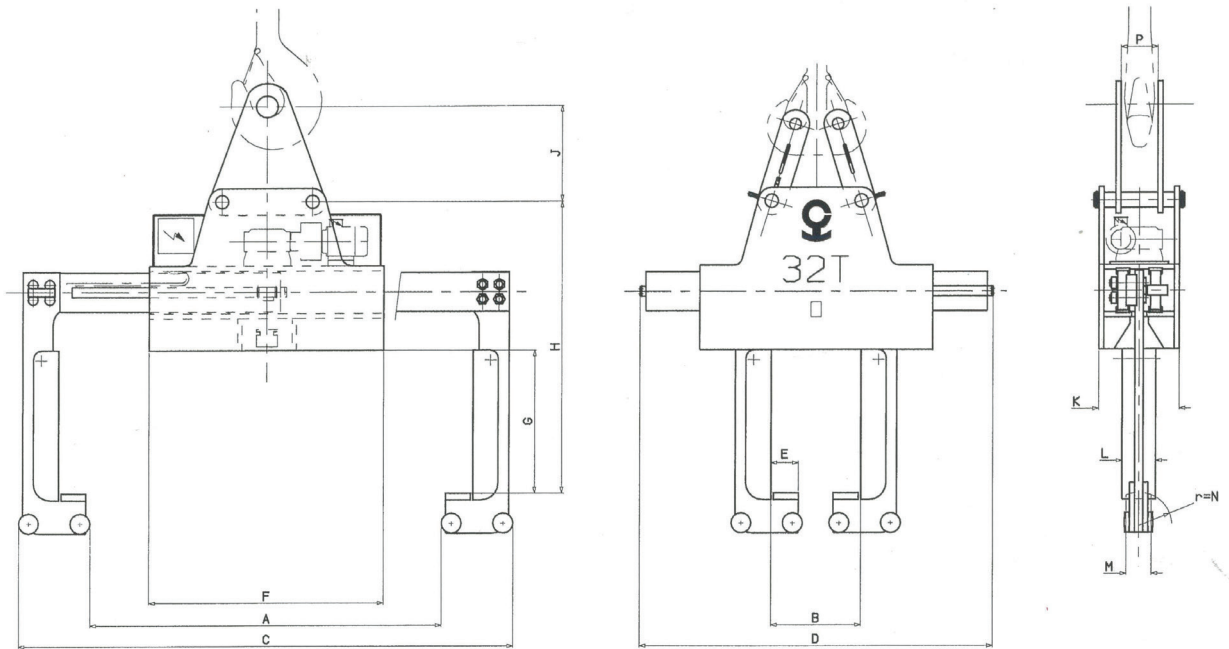

Type	M4	M6	M8	A	B	C	D	E	F	G	H	J CS/CD	K	L	M	N	P CS/CD	Weight (kg)
T010B	16t	12.5t	10t	1900	510	2690	1935	150	1300	835	1650	385/365	452	210	140	200	145/120	1100
T020B	32t	25t	20t	2100	250	2920	2135	165	1400	835	1725	520/480	460	210	160	250	195/155	1600
T030B	50t	40t	32t	2100	540	2960	2135	165	1400	835	1725	630/590	480	210	160	250	240/190	1900

- For the transportation of coils, rolls and bodies with horizontal axes.
- Manufactured with full quality assurance.
- Grab manufactured in high quality welded steel and both grab legs operated by means of rack and pinion.
- Grab legs operate within sliding guides utilising both gearing and a torque limiting coupling.
- Wiring system with cabling protected in plastic metallic conduits or alternatively in guide chains supplied complete with electric control panel.
- Documentation: CE certificate of conformity / full technical data supplied.

## Options:

- Safety device, sensor controlled to avoid opening of gripping legs whilst under load.
- Indicator to confirm gripping legs are locked in position
- Sliding protection device to ensure against load damage.
- Protective wheels on gripping legs.
- Gripping legs fitted with "SECUTEX" protection.
- Illuminated light signal confirming grabs are under load.